



13AMP SOCKET OUTLETS

Standards, Approvals & Directives

Complies with BS 1363-2: 2016+ A1:2018

Description:

13amp sockets available as single or double and switched or unswitched.

Features:

- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

Finishes:


All 13amp sockets are available with our complete range of plate finishes: Unlacquered Brass, Antique Bronze, Stainless Steel, Polished Nickel, Perspex and Painted.

Matching metal rocker switches available on all switched versions.

Sockets inserts are available in black and white.

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

13AMP SOCKET OUTLETS

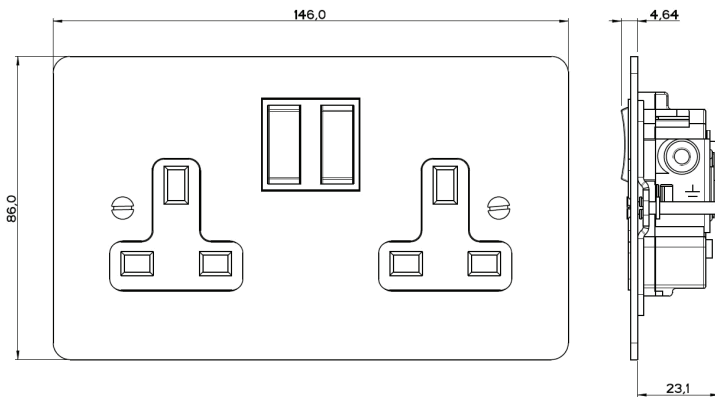


13Amp Twin Switched Socket Outlet

Depth:

- Twin Un-Switched Socket – 23mm
- Twin Switched Socket – 23mm
- Twin Switched Neon Socket – 23mm

Recommended Box Depth:

- 35mm Minimum
- Metal boxes to BS4662

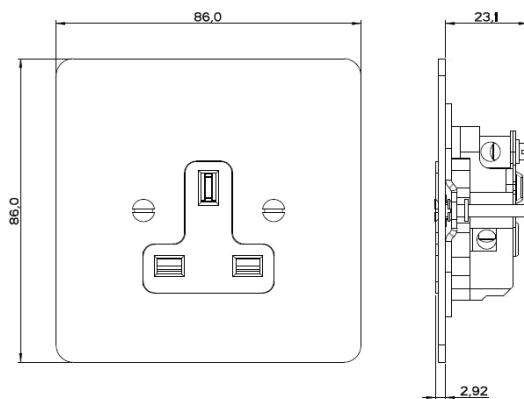

13Amp Single Unswitched Socket Outlet

Depth:

- Single Un-Switched Socket – 23mm
- Single Switched Socket – 23mm
- Single Switched Neon Socket – 23mm

Recommended Box Depth:

- 35mm Minimum
- Metal boxes to BS4662