



205A St John's Hill, London, SW11 1TH
 +44 (0) 20 7738 0202 | sales@forbesandlomax.com | www.forbesandlomax.com

Sockets

A full range of sockets and fused connections are available. Sockets are available as double or single and can be switched or unswitched.

Technical Information

- Complies with BS 1363-2: 2016+A4:2018.
- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switch sockets have double insulated rockers.
- All Forbes & Lomax switches and sockets require British standard 35mm deep flush wall boxes but recommend 47mm for ease of installation.

Available in the following ranges:

Painted
 Invisible
 Aged Brass*
 Antique Bronze*
 Unlacquered Brass

Brushed Brass
 Nickel Silver
 Stainless Steel
 Verdigris*

Rockers:

Antique Bronze
 Unlacquered Brass
 Brushed Brass
 Nickel Silver
 Stainless Steel

Trim:

Black
 White

*Available with black inserts only



Stainless Steel
 Verdigris


Nickel Silver
 Unlacquered Brass

Invisible
 Antique Bronze



205A St John's Hill, London, SW11 1TH
 +44 (0) 20 7738 0202 | sales@forbesandlomax.com | www.forbesandlomax.com

Technical Specification

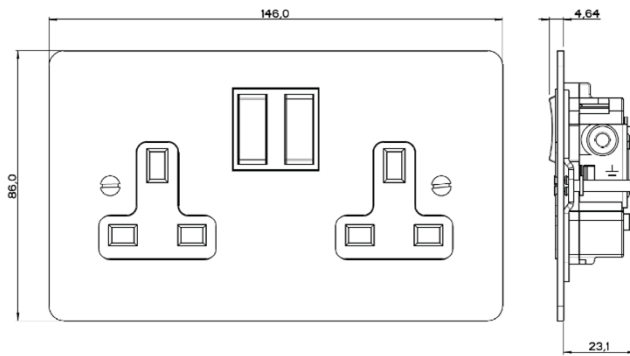


13amp Twin Socket

Depth:

Twin Un-Switched Socket – 23mm
 Twin Switched Socket – 23mm

Recommended Box Depth:

35mm minimum, 47mm recommended

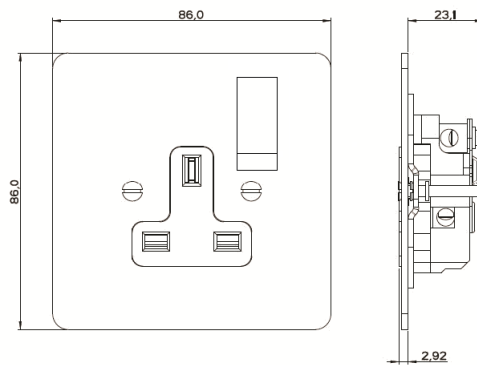

13amp Single Socket

Depth:


Single Un-Switched Socket – 23mm
 Single Switched Socket – 23mm

Recommended Box Depth:


35mm minimum, 47mm recommended

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket
Terminal Capacity	Live, Neutral & Earth
	3 x 2.5mm ²
	3 x 4mm ²
	2 x 6mm ² (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

Plate Dimensions



1 Gang

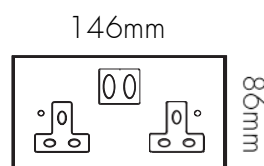

2 Gang